


LED Bulb T2 (E14) User Manual EN

Product Introduction

The LED Bulb T2 is a smart bulb that offers versatile dual-protocol support, bridging Zigbee and Thread to meet diverse user needs. In Zigbee mode*, users can access exclusive Aqara features and Matter compatibility via an Aqara hub. In Thread mode**, the bulb integrates directly with Matter-enabled ecosystems, including Apple Home, Google Home, and Alexa, providing robust, low-latency connectivity. The T2 fits into your personal smart home setup, whether you prefer Aqara's unique features or the broad connectivity of Thread.

*** To use in Zigbee mode with Aqara Home, a compatible Aqara hub is required.**

*** * To use the device with a particular Matter ecosystem, a Matter Controller and Thread Border Router of this ecosystem is required**.

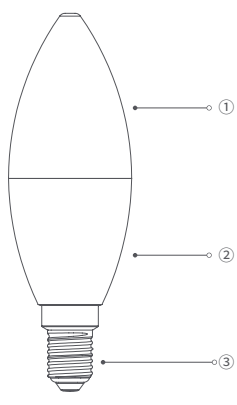

①Bulb Housing ②Bulb Shell ③E14 Socket


Warning

1. Operating this device incurs the risk of electric shock. Do not attempt to disassemble, repair, or modify this product.
2. Disconnect power before installing, replacing, or cleaning the bulb.
3. This product is intended for indoor use only. Do not use outdoors.
4. Use in dry locations only. Do not expose the product to water, excessive moisture, or other liquids.
5. This product may become hot during operation. Allow sufficient time for cooling before handling.
6. Do not install this product near heat sources and ensure adequate ventilation during use.
7. Do not use this product if it is damaged, cracked, or if any part of the device is broken.
8. This product is not suitable for use in completely enclosed fixtures unless otherwise specified.
9. This product is not intended for emergency lighting applications.
10. This product is not a toy and is not intended for use by children.


* Please make sure these warnings are considered, understood, and carefully observed to ensure safety. Failure to do so may result in personal injury or property damage.

Installation Guide


1. Before installing the lightbulb, make sure to turn off the main power supply or switch off the power to the lighting fixture where the bulb will be installed.



2. Hold the bulb firmly and align its base with the socket. Rotate the bulb clockwise to secure it. After installation, check the stability of the fixture to ensure it is secure and won't topple.

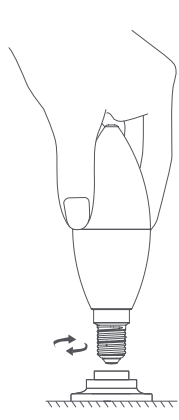

3. Once the power supply is restored or the light fixture is switched on, the bulb will go through two breathing cycles (fading in and out) before staying on at a constant brightness, indicating it has entered pairing mode.



Device Binding & Initialization

*** Download the Aqara Home app**

Search for "Aqara Home" in the Apple App Store, Google Play, Xiaomi GetApps, Huawei App Gallery, or scan the following QR code to download the Aqara Home app:



*** To use the device with a particular Matter ecosystem (Thread Mode), a Matter Controller and Thread Border Router of this ecosystem is required:**

1. Power on the bulb, and it will complete two breathing cycles (fading in and out) before remaining on at a constant brightness, indicating it has automatically entered pairing mode.
2. Open the Matter-compatible app, scan the Matter code from the manual or product, or enter the setup code to add the device to the app.
3. Proceed following the app's instruction.

*** To use the device in Aqara Home (Thread Mode), an Aqara Hub with border router function (for example, Hub M3) is required:**

1. Power on the bulb, and it will complete two breathing cycles (fading in and out) before remaining on at a constant brightness, indicating it has automatically entered pairing mode.
2. In the Aqara Home app, tap "Add Accessory" and select "LED Bulb T2." Keep your phone close to the device, and the bulb should appear in the app's discovery section. If the device is not found, scan the Matter code from the manual or product, or enter the setup code to add the device to the app.
3. Proceed following the app's instruction.

*** To use the device in Aqara Home (Zigbee Mode), an Aqara Zigbee Hub is required:**

1. Power on the bulb, and it will complete two breathing cycles (fading in and out) before remaining on at a constant brightness, indicating it has automatically entered pairing mode.
2. In the Aqara Home app, tap Add Accessory, keep the phone close to the device, and LED Bulb T2 will show in the app's discovery section. If the device is not found, scan the Matter code from the manual or product, or enter the setup code to add the device to the app. Then tap "Switch Protocol" and select "Zigbee protocol." Note that the device defaults to Thread protocol, and switching to Zigbee may take a few minutes.
3. Proceed following the app's instruction.

***** Use of the Works with Apple badge means that an accessory has been designed to work specifically with the technology identified in the badge and has been certified by the developer to meet Apple's performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.

How to Switch Protocols:

To switch protocols, you can either remove the device in the Aqara Home app or turn the device off and on 5 times to reset it. Then, repeat the pairing process, and on the device pairing screen, tap "Switch Protocol" and select the desired protocol. Follow the app's instructions to complete the setup.
Note: Switching protocols is equivalent to restoring factory settings, and will erase all settings and data.

*** Reset the device:**

Actions	**Results**
Turn the device off and on 5 times, with a 1-second pause in between.	**Reset:** Only clears the network pairing, without deleting other settings and records.
Turn the device off and on 10 times, with a 1-second pause in between.	**Factory Reset:** Restores the device to its original settings, clearing all configurations and data.

Product Specifications

Product Name	LED Bulb T2 (E14, CCT)	LED Bulb T2 (E14, RGB CCT)
Model	LB-L21E / LB-L21D	LB-L19E / LB-L19D
Wireless Protocols	Thread, Zigbee, Bluetooth	
Rated Power	4.9W	
Rated Parameters	100 - 240 V~, 50/60 Hz	
Dimensions	37 × 114 mm (1.46 × 4.49 in.)	
Operating Temperature	-10 °C ~ 45 °C (14 °F ~ 113 °F)	
Operating Humidity	0 ~ 95% RH, no condensation	
What is in the Box	LED Bulb T2 × 1, User Manual × 2	

Manufacturer: Lumi United Technology Co., Ltd.
Address: Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District, Shenzhen, China.
Email: support@aqara.com
Online Customer Service: www.aqara.com/support